

BEST AVAILABLE COPY

RL 031190

IB04/51984



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 14 OCT 2004

WIPO PAT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03103768.2

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03103768.2
Demande no:

Anmeldetag:
Date of filing: 13.10.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Boost converter

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H02M/

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Boost converter

The present invention relates to the field of DC/DC converters, and more particularly without limitation, to boost converters.

In the prior art boost converters are used for providing an output voltage which is greater than the supply voltage. This is especially useful for battery powered devices which
5 require a higher operating voltage than the battery voltage.

Typically boost converters are used as a power supply for white light emitting diodes, such as for illumination of displays or keyboards in portable applications, like mobile phones or personal digital assistants.

A boost converter is essentially a form of switch-mode power supply. Various
10 boost converter designs have been disclosed in the prior art, e.g. in US6,469,476B1, US5,847,949, US5,831,846, UK2302619A, and EP1049240A1.

Two major boost converter implementations are used at present. Capacitive boost converters which are also known as charge pumps, are mainly used in low cost applications and applications where the smallest size of components is important. The
15 capacitive converters are generally implemented as controlled voltage doubling circuits, as this leads to the smallest number of external components, i.e. two capacitors. Multiple white light emitting diodes (LEDs) have to be connected in parallel to the output of the capacitive boost converter. Individual current balancing resistors are needed to balance the currents through each white LED which is essential to obtain uniform brightness from the LEDs.

20 Inductive converters are used in applications where high power efficiency is more important than cost and/or size of the components. Inductive converters are more flexible with respect to the input/output voltage relation than capacitive converters. Multiple white LEDs can be connected in series, ensuring identical forward current and thus uniform brightness of all LEDs.

25 The present invention provides for a boost converter which can be operated both in a capacitive mode and in an inductive mode. This enables a user to optimize a given application either for low cost in the capacitive mode or best performance in the inductive mode without changing the converter itself. The mode selection is performed by means of a selection terminal.

In accordance with a preferred embodiment of the invention the selection terminal is not an extra selection pin but one of the terminals of the boost converter for coupling of external components. This is particularly advantageous as it limits the number of external pins of the boost converter.

5 In accordance with a further preferred embodiment of the invention the capacitive mode of operation is selected by coupling of an input voltage source to the selection terminal. To select the inductive mode the selection terminal is coupled to ground. This has the advantage that no extra pin is needed on the converter to set the capacitive or inductive mode.

10 In accordance with a further preferred embodiment of the invention the boost converter has a switch controller which provides switching sequences for the capacitive and inductive modes. In both the capacitive and inductive modes the switching sequences have an idle phase, energy storage phase and energy transfer phase.

15 In accordance with a further preferred embodiment of the invention the boost converter has a set of switches which are operated in the capacitive mode. A sub-set of the set of switches which are used in the capacitive mode are operated in the inductive mode.

In accordance with a further preferred embodiment of the invention, the switch controller is implemented by means of a counter which is coupled to a clock signal.

20 In accordance with a further preferred embodiment of the invention the boost converter has a comparator which is coupled to the selection terminal in order to determine the selection of the capacitive or inductive mode. By means of the comparator the voltage applied to the selection terminal is compared with a reference. If the voltage at the selection terminal surpasses the threshold this indicates that the capacitive mode has been selected; likewise, if the voltage at the selection terminal is below the threshold, this indicates that the
25 inductive mode has been selected.

In accordance with a further preferred embodiment of the invention the boost converter has a comparator which has one input coupled to an external resistive element. The comparator compares the voltage drop over the external resistive element with a voltage reference. When the voltage drop over the external resistive element indicates that more
30 energy is needed, i.e. when the voltage drop is below the voltage reference, a transition from the idle phase or energy storage phase to the energy transfer phase is triggered.

The present invention is particularly useful for battery powered applications, such as LED supply circuits and boost converters for subscriber identity modules (SIMs) of mobile phones, USB interfaces or other 5 V based interfaces in battery powered applications.

In the following preferred embodiments of the invention will be described in greater detail by making reference to the drawings in which:

5 Fig.1 is a schematic circuit diagram of a preferred embodiment of a boost converter in capacitive mode,

 Fig. 2 is illustrative of a switching sequence of the switches of the boost converter in the capacitive mode,

10 Fig. 3 is a schematic circuit diagram of the boost converter of figure 1 in inductive mode,

 Fig. 4 is illustrative of a switching sequence of the switches of the boost converter in the inductive mode,

 Fig. 5 is a flow chart of a preferred embodiment of a method of the invention.

15

 Fig. 1 shows boost converter 100. Boost converter 100 has external terminals Vin, Gnd, Vout, Swp, Swn and M.

20 Switches S1 and S2 are connected in series between terminal Vin and Vout. Terminal Swp is coupled to the common terminal of switches S1 and S2. Switch S3 is coupled between terminals Vin and Swn. Switch S4 is coupled between Gnd and Swn.

 Further boost converter 100 has switch controller 102. Switch controller 102 provides output signals S1, S2, S3 and S4 in order to control the respective switches S1, S2, S3 and S4. Switch controller 102 implements two alternative switching sequences for the switches S1 to S4 corresponding to the capacitive and the inductive modes.

25 Switch controller 102 is coupled to the output of Smith trigger 104 which determines the mode selection. Smith trigger 104 has its input coupled to the mode selection terminal, i.e. terminal Vin.

30 Comparator 106 of boost converter 100 compares the voltage applied at feedback terminal Fb with reference voltage Vref. When the voltage at terminal Fb drops below the reference voltage Vref comparator 106 provides a trigger signal to switch controller 102 in order to start the applicable switching sequence.

 In the application example considered here battery 108 is coupled between terminals Vin and Gnd of boost converter 100. Battery 108 delivers a DC voltage which is to be up-converted by boost converter 100 to a higher DC voltage.

External capacitor 110 is coupled between terminals Swp and Swn of boost converter 100; external capacitor 112 is coupled between terminal Vout and ground.

At least one external light emitting diode (LED) is coupled between terminals Vout and M of boost converter 100. Further external resistor Rled is coupled between terminal Fb and ground. One or more series connections of further LEDs and resistors Rled can be connected in parallel between terminal Vout and ground.

In operation the battery voltage applied at terminal Vin causes a mode selection signal at the output of Smith trigger 104 which indicates the capacitive mode. In response switch controller 102 selects the switching sequence for the capacitive mode.

By means of the selected switching sequence boost converter 100 transfers a sufficient amount of charge into capacitor 110 to provide an about constant supply voltage for the at least one LED 114. The amount of charge which is provided from boost converter 100 to capacitor 110 is regulated by measuring the voltage drop over resistor Rled and comparing the voltage drop with Vref by comparator 106. The voltage at terminal Fb is thus controlled to be about equal to Vref. Hence the current through LED 114 and resistor Rled is about

$$I_{led} = V_{ref}/R_{led}.$$

Fig. 2 shows the switching sequence for the capacitive mode in more detail. The switching sequence has an idle phase, an energy storage phase, and an energy transfer phase.

In the idle phase all switches S1 to S4 are open. In the energy storage phase switches S1 and S4 are controlled by switch controller 102 (cf. figure 1) to be closed whereas switches S2 and S3 remain open. This way capacitor 110 is coupled in parallel to the supply voltage provided by the external battery which is coupled to the boost converter. Thus charge is "pumped" into capacitor 110.

After a predetermined amount of time the switching sequence goes over to the energy transfer phase in which the switches S1 and S4 are controlled by the switch controller to be open and switches S2 and S3 are closed. This way charge is provided from capacitor 110 to the external load, i.e. the at least one LED 114 in the example considered here.

In other words capacitor 110 is charged with the Vin voltage in the energy storage phase; thus the charge Q on capacitor 110 equals $Q = V_{in} \cdot C_{110}$, where C110 is the capacitance of capacitor 110. During the energy transfer phase the charge on capacitor 110 is transferred to the output, thus to capacitor 112, such that the output voltage is increased by $V_{in} \cdot C_{100}/C_{112}$, where C112 is the capacitance of capacitor 112.

The output load, which are LEDs in this case, is supplied from capacitor 112 so the charge on capacitor 112 is decreased by the load $\Delta Q = I_{load} \cdot \text{time}$, where I_{load} is the total of the currents I_{led} .

A lower voltage on capacitor 112 leads to a lower load current, thus a lower voltage on the terminal Fb. So after some time the voltage on the feedback terminal Fb decreases below the switching level of comparator 106. When this occurs a new sequence is initiated. The current feedback thus insures that the repetition frequency of the switching sequences leads to the desired average current level through the load, so

$$F_{sw} * V_{in} * C_{110} = I_{led} * R_{led} \Rightarrow F_{sw} = (I_{led} * R_{led}) / (V_{in} * C_{110})$$

where F_{sw} is the switching frequency.

Next the switching sequence implemented by switch controller 102 goes back into the idle phase until the next switching sequence is triggered by comparator 106. It is to be noted that the switching sequence can either start in the idle phase or in the energy storage phase depending on the implementation.

Fig. 3 shows boost converter 100 in the inductive mode. In the inductive mode terminals V_{in} and Gnd are coupled to ground. Terminal V_{out} is coupled to an external load. In the example considered here this is at least one LED 114 or a series of LEDs 114. Further terminal V_{out} is coupled to external capacitor 116 which has its other terminal connected to ground.

Terminals Swp and Swn are coupled to one terminal of inductance 118. The other terminal of inductance 118 is connected to battery 108.

The inductive mode is detected by Smith trigger 104 due to the ground potential at mode selection terminal V_{in} . In response to the corresponding mode selection signal "DC_mode" provided by Smith trigger 104 switch controller 102 selects switching sequence for the inductive mode.

By means of this switching sequence energy is provided from boost converter 100 to inductance 118 which supplies the at least one LED 114. The energy transfer from boost converter 100 to inductance 118 is controlled on the basis of the voltage drop over resistor R_{led} that is sensed at terminal Fb. This results in an about constant current I_{led} through the at least one LED 114, i.e.

$$I_{led} = V_{ref} / R_{led}$$

The switching sequence for the inductive mode is explained in more detail in Fig. 4. The switching sequence in the inductive mode has an idle phase, energy storage phase and energy transfer phase as it is the case in the capacitive mode. In the idle phase all switches are open. In the energy storage phase switch S4 is closed while all other switches remain open. This way a current flows through inductance 118 such that energy is stored in the resulting electromagnetic field.

In the subsequent energy transfer phase this energy is transferred from inductance 118 to the load. In the energy transfer phase switch S2 is closed and switch S4 is opened while switches S1 and S3 remain open. The comparator 106 triggers a new sequence starting with the energy storage phase. In the preferred embodiment considered here comparator 106 does not initiate the energy transfer phase. The energy storage phase has a fixed duration set by the controller 102. The energy transfer phase follows automatically after the energy storage phase.

The energy transfer phase is ended when all of the energy in the inductor is transferred to the output, so when the currents in the inductance is reduced to zero. This moment is typically detected by comparator 107 which monitors the current through switch S2. The idle phase is entered when comparator 107 detects a zero current level in switch S2. The feedback comparator initiates a new sequence when the output current dropped below the threshold level of the feedback comparator 106. It is to be noted that the zero current detection comparator 107 is not used, i.e. not activated, in the capacitive mode.

It is to be noted that in the preferred embodiment considered here the switching sequences for the capacitive mode and inductive mode are identical, except that switches S1 and S3 are not operated in the inductive mode, i.e. switches S1 and S3 remain open at all times in the inductive mode.

Fig. 5 shows a corresponding flow chart. In step 200 power is switched on. In step 202 the selected mode is determined. This is done by comparing the voltage potential at selection terminal Vin with a threshold level. If the potential at Vin is above the threshold this indicates that the capacitive mode has been selected. As a consequence the capacitive switching sequence is selected in step 204. If the contrary is the case the inductive switching sequence is selected in step 206.

In either case it is determined in step 208 whether the voltage at terminal Fb is below the reference voltage Vref. If this is not the case nothing happens until the voltage potential at terminal Fb has dropped below the reference voltage Vref. When voltage potential at terminal Fb has dropped below the reference voltage Vref the switching sequence

is started in step 210 in order to enter the energy transfer phase such that the voltage potential at terminal Fb is increased above the reference voltage V_{ref} . After a predetermined amount of time the energy transfer phase is completed and the control goes back to step 208.

LIST OF REFERENCE NUMERALS:

100	boost converter
102	switch controller
104	Smith trigger
106	comparator
107	comparator
108	battery
110	capacitor
112	capacitor
114	LED
116	capacitor
118	inductance

CLAIMS:

1. A boost converter having a capacitive mode and an inductive mode of operation, and a selection terminal (Vin) for selecting the capacitive or inductive mode.
2. The boost converter of claim 1, wherein the selection terminal is coupled to a voltage source (108) in the capacitive mode and wherein the selection terminal is coupled to ground (Gnd) in the inductive mode.
3. The boost converter of claim 1 or 2, further comprising switching means (102, S1, S2, S3, S4) for performing a switching sequence, the switching sequence comprising an idle phase, an energy storage phase and an energy transfer phase.
4. The boost converter of claim 3, the switching means having a set of switches (S1, S2, S3, S4) for the capacitive mode and a sub-set (S2, S4) of the set of switches for the inductive mode.
5. The boost converter of claim 3 or 4, the switching means comprising counter means for receiving a clock signal.
6. The boost converter of any one of the preceding claims, further comprising a first comparator (104) being coupled to the selection terminal for determining a selection of the capacitive or inductive mode.
7. The boost converter of any one of the preceding claims, further comprising a second comparator (106) for comparing a voltage drop over an external resistive element (Rled) and a voltage reference (Vref) in order to trigger a transition from an idle phase to an energy storage phase.
8. A power supply comprising:
- means for receiving a battery (108),

- a boost converter (100) having a capacitive mode and an inductive mode, and at least first (V_{in}) and second (S_{wn}) terminals,

wherein the battery is coupled to the first terminal for selection of the capacitive mode and the battery is coupled to the second terminal for selection of the inductive mode.

9. A method of DC/DC conversion, the method comprising the steps of:

- selecting of a capacitive or an inductive mode in order to determine a switching sequence,

10 - performing the switching sequence to provide an idle phase, an energy storage phase and an energy transfer phase,

wherein a set of switches (S_1, S_2, S_3, S_4) is operated in the capacitive mode and a sub-set (S_2, S_4) of the set of switches is operated in the inductive mode.

15 10. The method of claim 9, whereby the capacitive or inductive mode is selected by coupling of a selection terminal (V_{in}) to a one of first and second predefined voltages.

11. The method of claim 10, wherein the first predefined voltage is a voltage provided by a voltage source (108) in the capacitive mode and wherein the second predefined voltage is ground potential in the inductive mode.

20

ABSTRACT:

The present invention relates to a boost converter which can operate both in a capacitive and in an inductive mode. The mode is selected by means of a selection terminal which is also used in the capacitive mode for coupling of a battery to the boost converter.

5 Fig.1

Fig.1

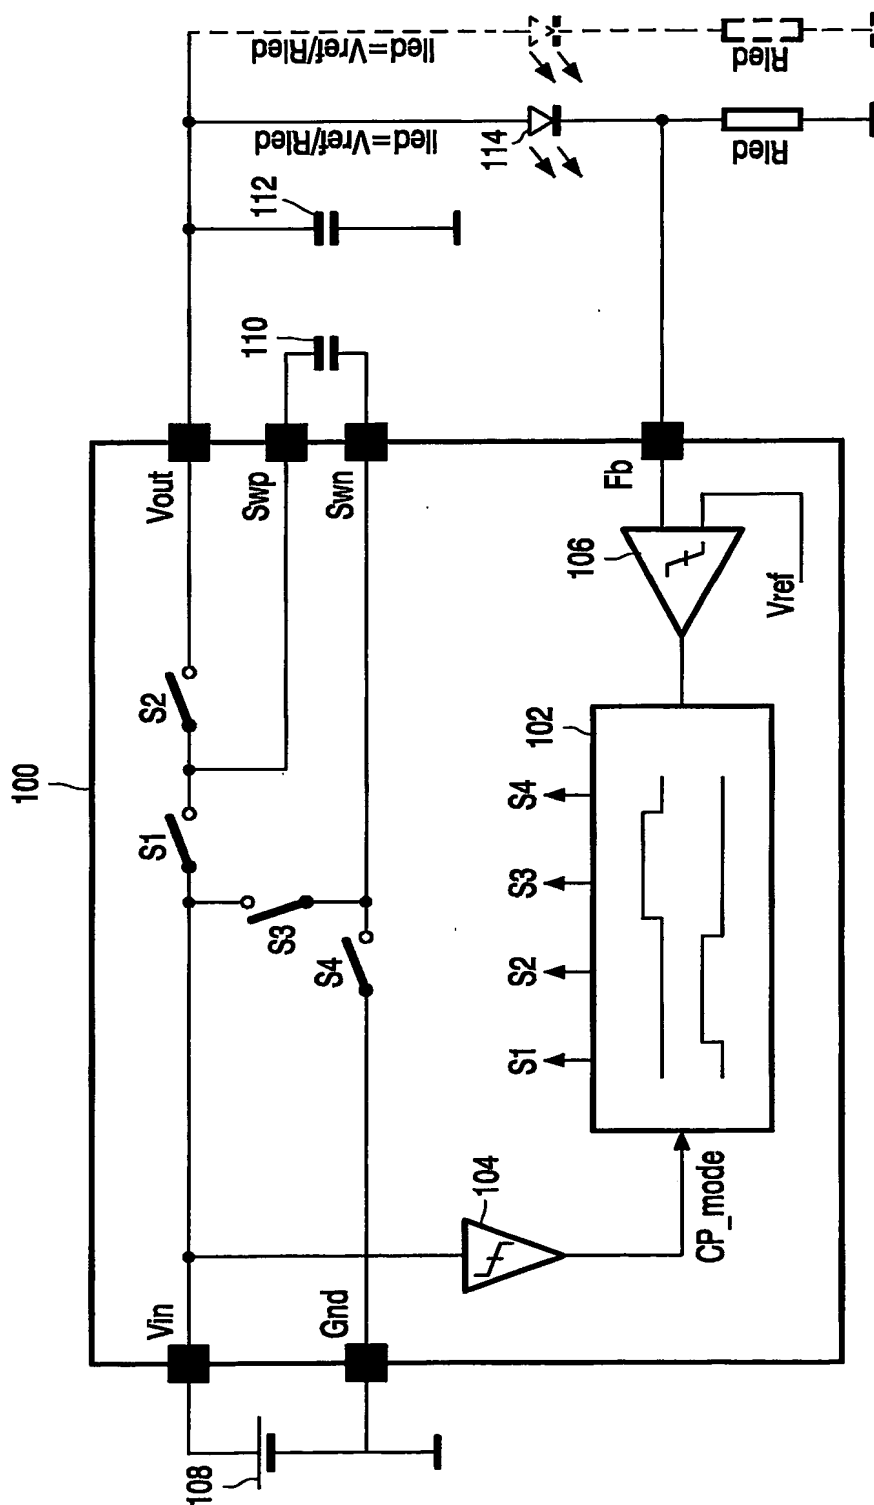


FIG. 1

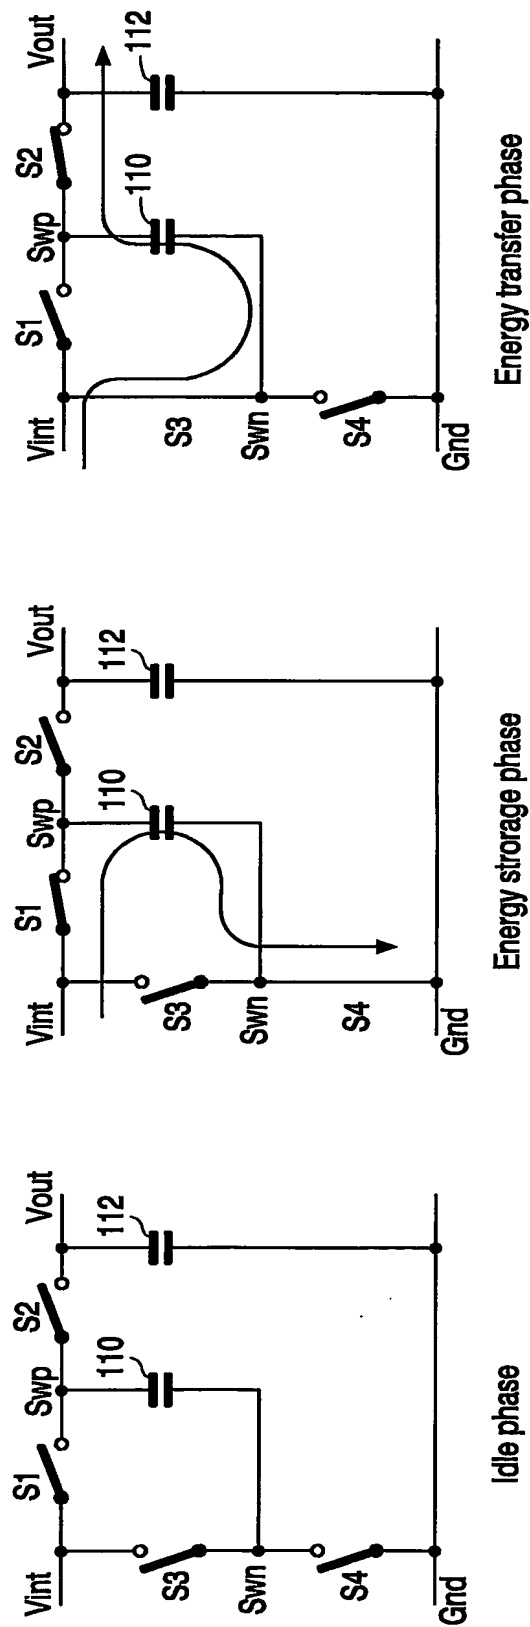


FIG. 2

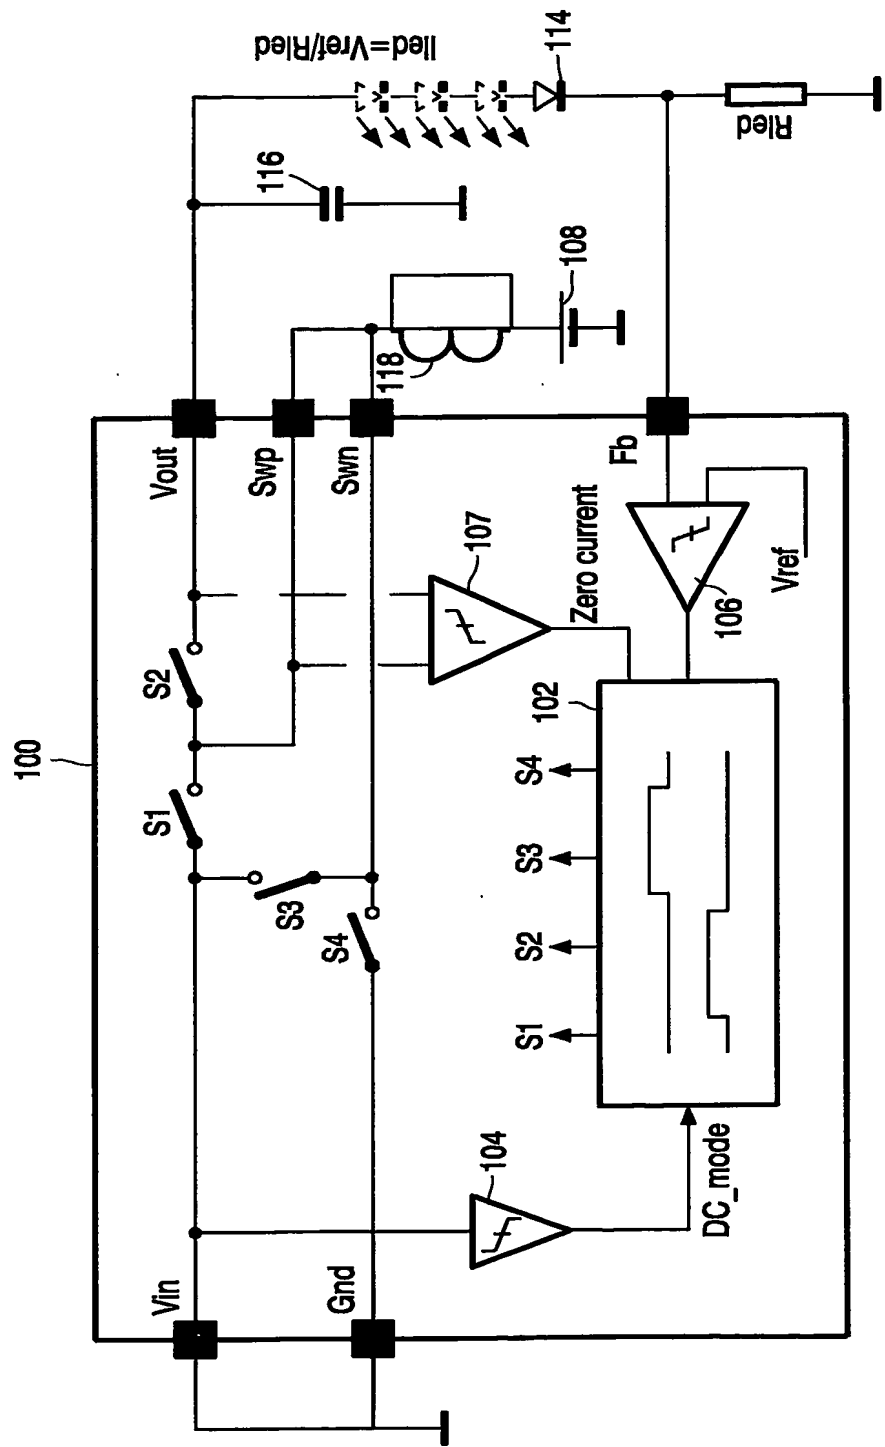


FIG. 3

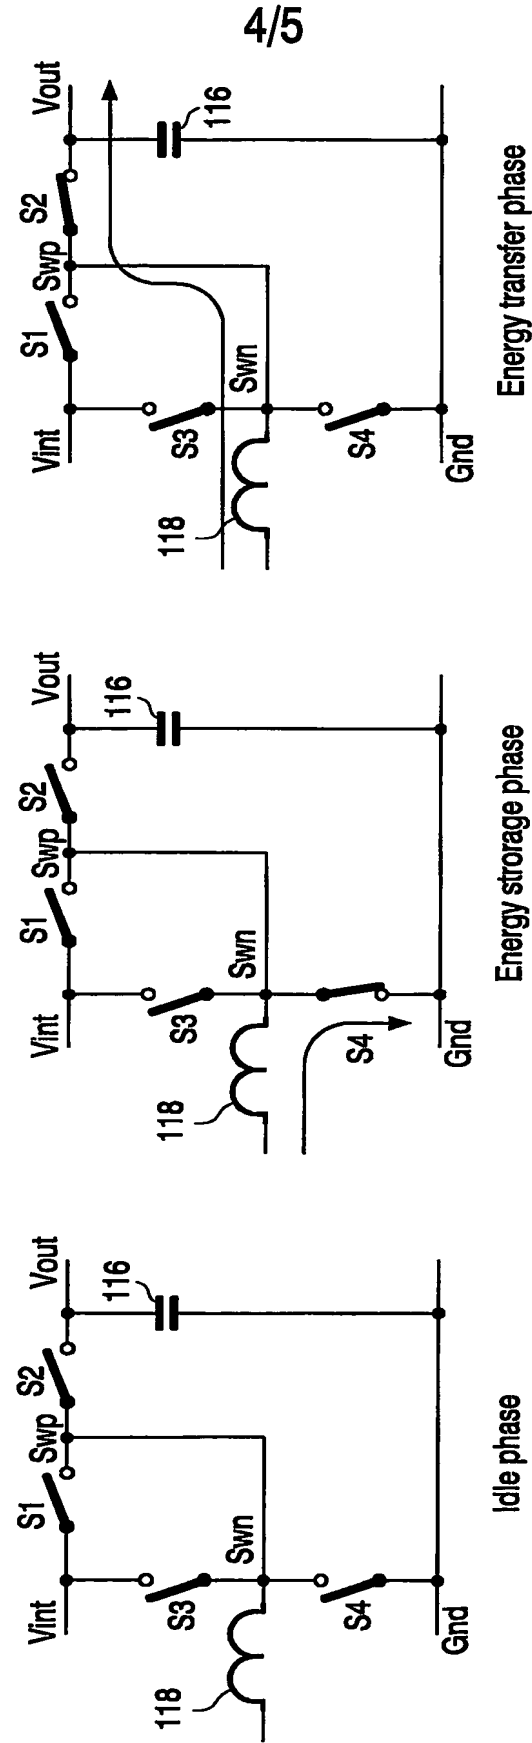


FIG. 4

5/5

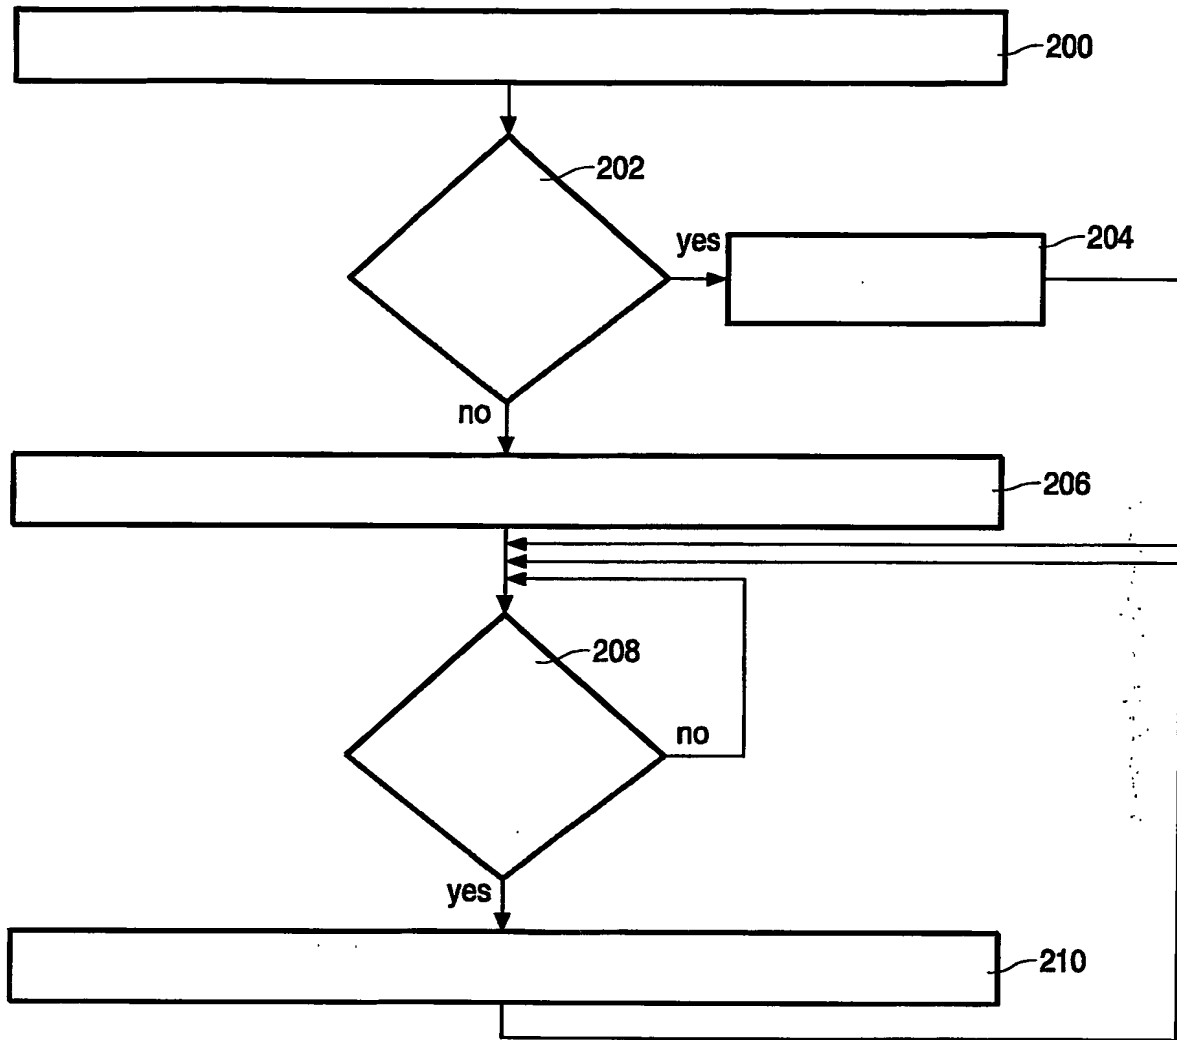


FIG. 5

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☒ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.